

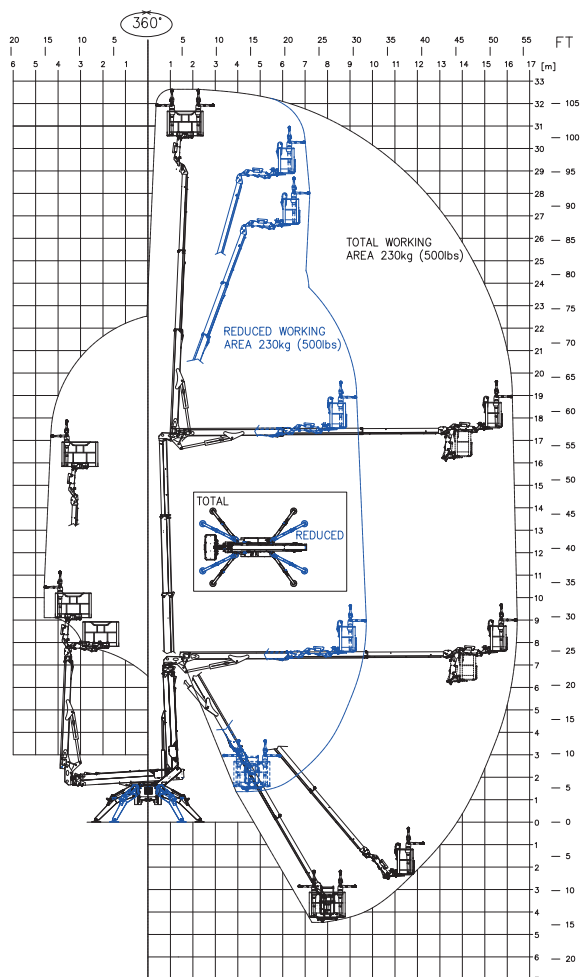
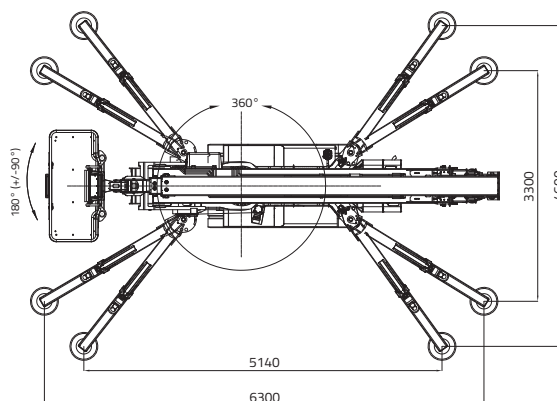


LL33.17



CAPACITY 230 kg
(2 persons 80x2=160 kg + tool box 70 kg)

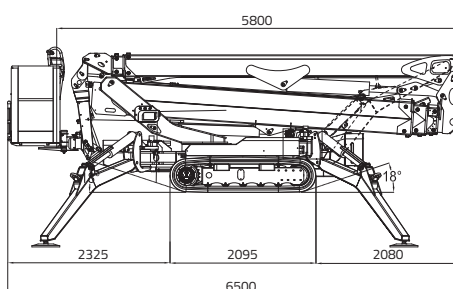

32,60 m



1.600 x 700 x h. 1.100 mm



Wide stabilization area
4.600 x 5.140 mm
Narrow stabilization area
3.300 x 6.300 mm



16,50 m



180° (+/-90°)



Automatic set up system IIIS std



6,50 m



16° / 28,7%



Remote control



5,80 m



1.200 / 1.700 mm



GPRS-GPS



1,99 m



5.000 daN - 4 daN/cm²



R.A.H.M.



LL33.17



DIESEL ENGINE

BrandKUBOTA
TypeD902 Autorev
Pistons no. and displacement.....898 cm³
Max. gross power
..... 21,6 HP - 16,1 kW @3200rpm
Electrical start..... 12 volt

LITHIUM-ION ENGINE

Battery 150 Ah
Electric motor:
- rated voltage.....76 V
- rated power..... 3,5 kW
Onboard battery charger.... 110V-230V+-30V 50-60 Hz
Autonomy (continuous cycle)*4-5 h
Recharge time on flat batteries
..... 4 h (indicative)
Recharge time to 80% on flat batteries.....
..... 2 h (indicative)
* (Autonomy measured with Hinowa H1 operating cycle)

HYDRAULIC PUMPS

Electric motor no.2 gear pumps

TRACKED UNDERCARRIAGE

Track tensioner grease-filled
Rollers no. per side 6 + slide
Widening system..... 1200 / 1700 mm
Translation speed with 2nd auto2speed:
- diesel engine 0,8 - 1,8 km/h
- lithium-ion engine 0,6 - 1,3 km/h

WEIGHT MACHINE 7860 kg
MAX UPPER SLANT 16° / 28,7 %
MAX WIND SPEED 12,5 m/s